


Guida rapida alla configurazione del Modem Router/Wireless NETGEAR MBR1310



- 1) Inserire la (U)SIM card nel router (utilizzare lo slot situato sul pannello posteriore)
- 2) Collegare, le antenne esterne alla prese SMA-RP presenti sulla parte posteriore del pannello
- 3) Inserire l'alimentatore nella presa 220V ed il connettore nella presa sul pannello posteriore (Power) ed accendere il router dal tasto ON/OFF presente sul pannello posteriore.
- 4) Connettersi al router da un PC tramite cavo LAN (collegare il cavo in dotazione indifferentemente su una delle 4 porte LAN disponibili)
- 5) Dal PC connesso al router (tramite cavo lan o wifi) aprire il browser e digitare nella barra degli indirizzi: **<http://www.routerlogin.net>** e premere invio.
Comparirà una maschera con la richiesta di USER ID e password : inserite la admin: **admin** / password: **password** , poi confermare. Si aprirà il menu di configurazione del router:


6) Dal menu a sinistra selezionare “Broadband Settings”, e scegliere una delle seguenti opzioni:

1. Use Ethernet first and if fail use mobile broadband connection (**Failover**: Usare la connessione via WAN come principale e quella 3G come backup)
2. Always use mobile broadband connection (usare sempre la connessione dati 3g)
3. Always use Ethernet connection (Usare sempre la connessione WAN)

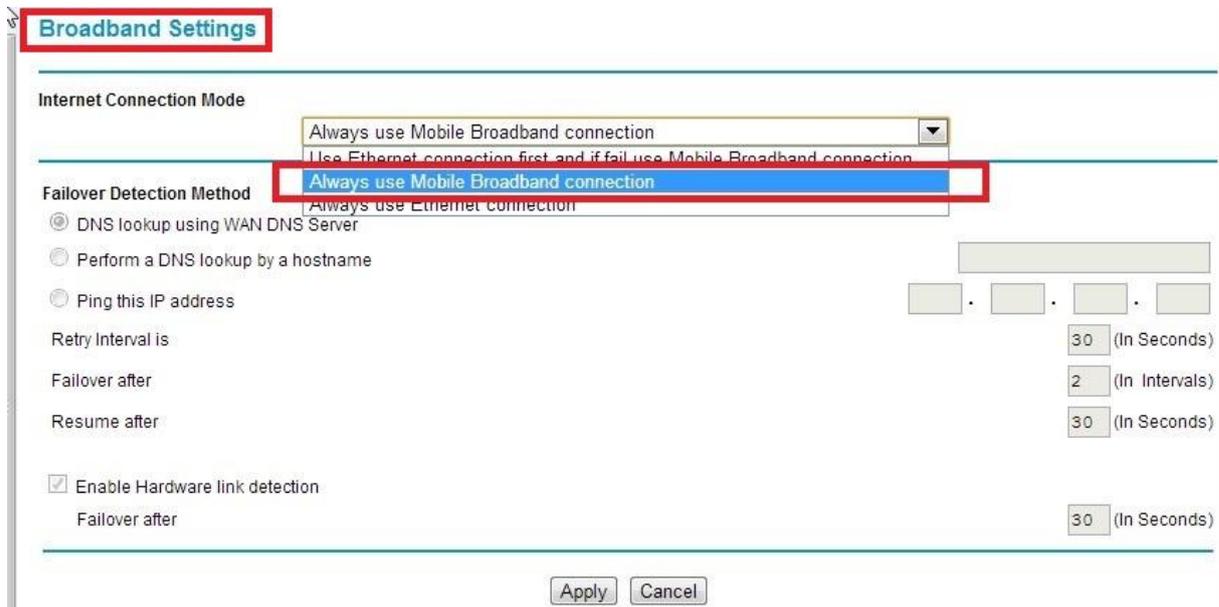

The screenshot shows the 'Broadband Settings' page. The 'Internet Connection Mode' dropdown is set to 'Always use Mobile Broadband connection'. The 'Failover Detection Method' dropdown is also set to 'Always use Mobile Broadband connection'. Below this, there are radio buttons for 'DNS lookup using WAN DNS Server', 'Perform a DNS lookup by a hostname', and 'Ping this IP address'. The 'Retry Interval is' is set to 30 (In Seconds), 'Failover after' is 2 (In Intervals), and 'Resume after' is 30 (In Seconds). There is a checkbox for 'Enable Hardware link detection' which is checked, with a 'Failover after' of 30 (In Seconds). 'Apply' and 'Cancel' buttons are at the bottom.

7) Aprire la pagina “Broadband Settings” apparirà la schermata seguente:

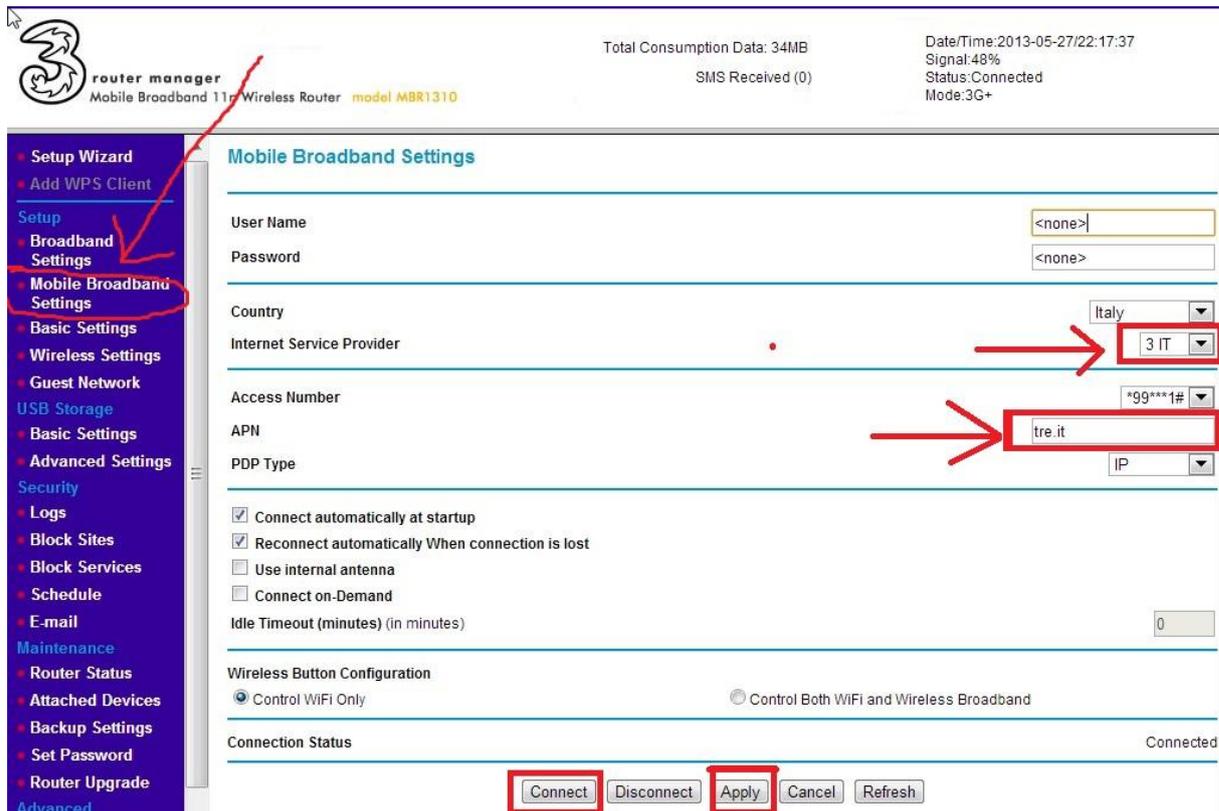

The screenshot shows the 'Mobile Broadband Settings' page. The left sidebar has 'Broadband Settings' and 'Mobile Broadband Settings' highlighted. The main area has fields for 'User Name' (set to <none>), 'Password' (set to <none>), 'Country' (set to Italy), 'Internet Service Provider' (set to 3 IT), 'Access Number' (set to *99***1#), 'APN' (set to tre.it), and 'PDP Type' (set to IP). There are checkboxes for 'Connect automatically at startup', 'Reconnect automatically When connection is lost', 'Use internal antenna', and 'Connect on-Demand'. The 'Idle Timeout (minutes)' is set to 0. The 'Wireless Button Configuration' has 'Control WiFi Only' selected. The 'Connection Status' is 'Connected'. At the bottom, there are 'Connect', 'Disconnect', 'Apply', 'Cancel', and 'Refresh' buttons.



Telefonia - Elettronica - Telecomunicazioni

via G. Oberdan, 64 – 70042 Mola di Bari (BA) - Italy

Tel: 080-2145146 / Fax: 080-2142677

Email: marotecsas@gmail.com - info@marotec.it / Web: www.marotec.it

Nei campi a destra inserire, Country: Italy, Internet service Provider: **3IT** (per sim 3 ITA), selezionare **Other** per **SIM di altri operatori**.

Posizionare il cursore nel campo “**APN**”, ed inserire l’APN in base alla SIM utilizzata:

(U)SIM TRE ITA: APN: tre.it

SIM Vodafone: APN: web.omnitel.it

SIM Tim: APN: ibox.tim.it

SIM WIND: APN: internet.wind

SIM POSTEMOBILE: APN: postemobile.it

Dal menu a tendina selezionare nel campo **PDP Type: IP**.

Poi click su **Apply e dopo su **Connect**, attendere qualche minuto affinché il router salvi i parametri ed effettui la connessione.**

N.B.: In alcune zone potrebbe essere necessario cambiare il canale di trasmissione per conflitti con altri trasmettitori WiFi e per aumentare la portata del segnale, in questo caso dal menu a tendina “WLAN Channel” è possibile impostare un canale di trasmissione.

Per altre configurazioni (DynDNS, WAN, Failover ed altre impostazioni avanzate), fare riferimento al manuale completo in lingua inglese disponibile nella sezione download del sito.